


WQ40 Westquip Generators

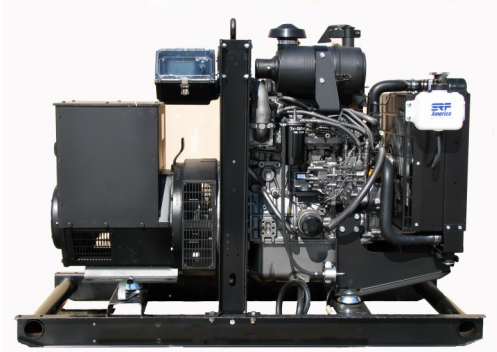

WQ40 Diesel Generator Set

Prime output 60Hz: 40kW / 50kVA
Standby output 60Hz: 45kW / 56kVA

Prime output 50Hz: 36kW / 45kVA
Standby output 50Hz: 40kW / 50kVA

Fuel Consumption L/hr: 1/2 load: 6.7 Full load: 12.2

Generator set pictured may include optional accessories.

Voltage	Frequency	P.F.	Amps	kW	kVA
120/240 - 1PH	60Hz	1.0	167	40	40
120/208 - 3PH	60Hz	0.8	139	40	50
277/480 - 3PH	60Hz	0.8	60	40	50
347/600 - 3PH	60Hz	0.8	48	40	50

GENERATOR SET FEATURES:

- Yanmar liquid cooled diesel engine
- Newage-Stamford generator with Automatic Voltage Regulator -*CSA/UL approved*
- Low oil pressure and high water temperature Safety Shutdown System
- Digital generator control panel with LED display (DC volt meter, hour meter, oil pressure, coolant temperature gauges, AC Volt and Frequency)
- Standard remote Auto Start / Stop capability via two wire, closed contact logic, allows for connection to automatic transfer switchgear and other remote starting devices.
- Electronic governor speed control
- Heavy-Duty steel skid base with anti-vibration isolators and start stand
- Lift bail assembly
- Radiator assembly with grill, fan and belt guards
- Exhaust muffler assembly
- Air cleaner assembly
- Battery cables
- Operators manual and start instruction procedures
- Unit serviced and load tested

panel

DIMENSIONS

Length: 1715mm (67.5")
Width: 775mm (30.5")
Height: 1219mm (48")
Weight: 646kg (1425lbs)
Approx. dimensions





WQ40 Westquip Generator

ENGINE SPECIFICATIONS:

- Yanmar 4TNV98T *EPA interim Tier 4* liquid cooled diesel
- 67.2Hp @ 1800 RPM ; 56.0HP @ 1500 RPM
- 12V electrics
- Electric and self priming fuel lift pump
- Turbo charged
- Fuel water separator filter
- Mechanical fuel injection system
- In-line 4 cylinder, 4 stroke
- Displacement: 3.3L
- Glow plug cold starting aid
- Electronic governor engine control
- Yanmar 3 year/3000-hour engine warranty
- Fan, belt, and core guards
- EGR cooler

GENERATOR SPECIFICATIONS:

- Newage-Stamford
- Single bearing, brushless
- Automatic Voltage Regulator (AVR Controlled)
- +/- 1% voltage regulation
- IP23 enclosure protection
- Class H insulation
- 1 year warranty
- UL/CSA approved

OPTIONAL ACCESSORIES:

- Remote oil drain kit
- Engine coolant heater—120V
- Battery and box
- Sub-base fuel tank
- All weather metal enclosures
- Main circuit breaker
- Positive air safety shutoff valve
- Trailer

WARRANTY:

- Package: 1 year / unlimited hours
- Yanmar Engine: 2 year / 2000-hour engine warranty (3 year / 3000hr major component)
- Newage-Stamford Generator: 1 year / unlimited hours

